


ELECTRONICS

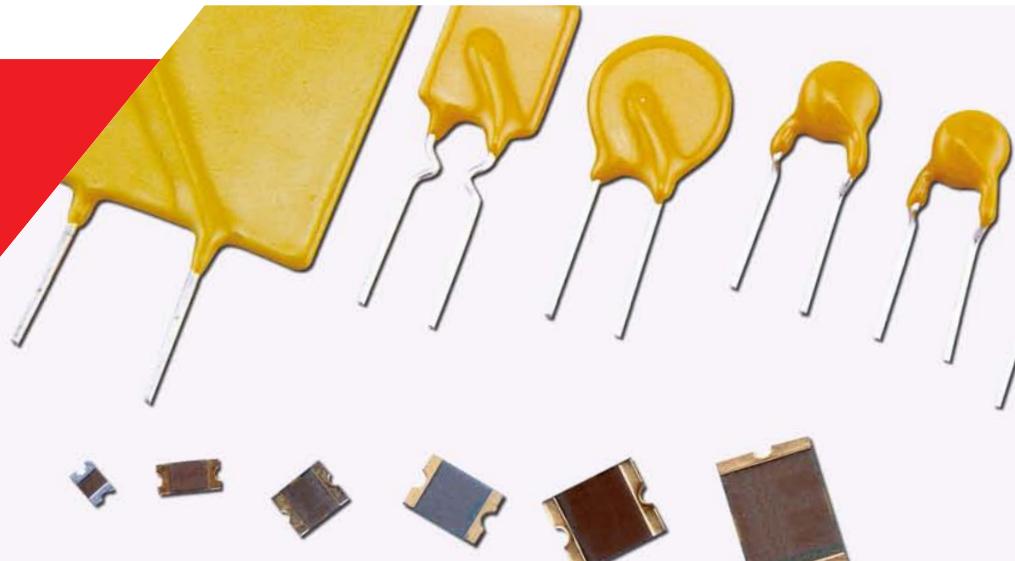

# Positive Thermal Coefficient

SMD1812 Series

**361°** Circuit Protection  
System

Specifications are subject to change without notice.

# Positive Thermal Coefficent - SMD1812 Series

## Features


1. I(hold): 0.1~3.5A
2. RoHS compliant, lead-free and halogen-free
3. Fast response to fault currents
4. Compact design saves board space
5. Low resistance
6. Low-profile
7. Compatible with high temperature solders



## Applications


1. USB peripherals
2. Disk drives
3. CD-ROMs
4. Plug and play protection for motherboards and peripherals
5. Mobile phones - battery and port protection
6. Disk drives
7. PDAs / digital cameras
8. Game console port protecti

## Product Name

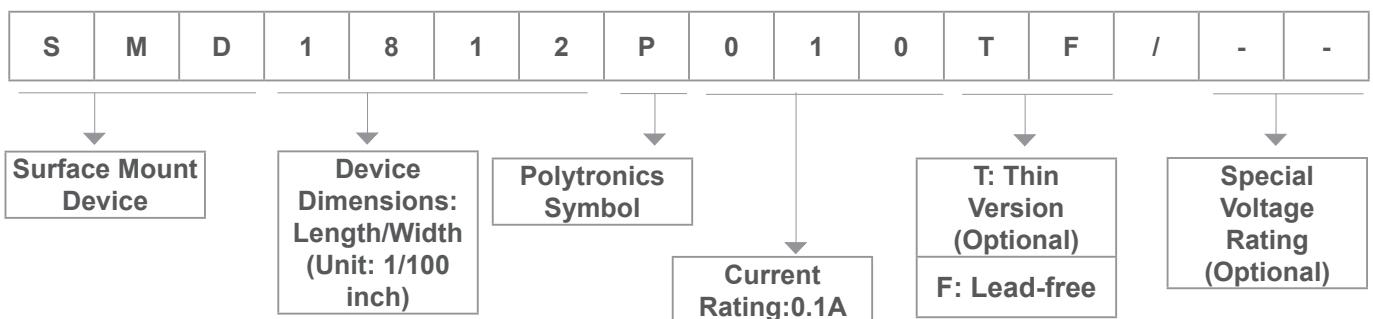

# Positive Thermal Coefficient - SMD1812 Series

## Dimension



Type Number	Marking	I hold		Itrip		Maximum Time To Trip		Vmax	Imax	Pdmax	Rmin	R1max	Package	Package Dimensions (mm)					
		A	A	Current A	Time s	Vdc	A							A		B		C	
														min	max	min	max	min	max
SMD1812P010TF	010	0.1	0.3	0.5	1.5	30	100	0.8	0.75	15	1812	4.37	4.73	3.07	3.41	0.5	1	0.3	
SMD1812P014TF	014	0.14	0.34	1.5	0.15	60	100	0.8	0.65	6	1812	4.37	4.73	3.07	3.41	0.5	1	0.3	
SMD1812P020TF	020	0.2	0.4	8	0.02	30	100	0.8	0.35	5	1812	4.37	4.73	3.07	3.41	0.5	1	0.3	
SMD1812P030TF	030	0.3	0.6	8	0.1	30	100	0.8	0.25	3	1812	4.37	4.73	3.07	3.41	0.5	1	0.3	
SMD1812P050TF	050	0.5	1	8	0.15	15	100	0.8	0.15	1	1812	4.37	4.73	3.07	3.41	0.4	0.9	0.3	
SMD1812P050TF/30	050 30V	0.5	1	8	0.15	30	100	0.8	0.4	0.17	1812	4.37	4.73	3.07	3.41	0.5	0.9	0.3	
SMD1812P075TF	075	0.75	1.5	8	0.2	13.2	100	0.8	0.09	0.45	1812	4.37	4.73	3.07	3.41	0.4	0.9	0.3	
SMD1812P075TF/24	075 24V	0.75	1.5	8	0.2	24	100	0.8	0.11	0.29	1812	4.37	4.73	3.07	3.41	0.75	1.55	0.3	
SMD1812P075TF/33	075 33V	0.75	1.5	8	0.2	33	20	0.8	0.11	0.4	1812	4.37	4.73	3.07	3.41	0.75	1.55	0.3	
SMD1812P110TF	110	1.1	2.2	8	0.3	8	100	0.8	0.05	0.25	1812	4.37	4.73	3.07	3.41	0.4	0.9	0.3	
SMD1812P110TF/16	110 16V	1.1	2.2	8	0.3	16	100	0.8	0.05	0.25	1812	4.37	4.73	3.07	3.41	0.6	1.3	0.3	
SMD1812P110TF/24	110 24V	1.1	2.2	8	0.5	24	20	0.8	0.06	0.2	1812	4.37	4.73	3.07	3.41	0.5	1.07	0.3	
SMD1812P110TF/33	110 33V	1.1	2.2	8	0.5	33	20	0.8	0.06	0.2	1812	4.37	4.73	3.07	3.41	1.2	2	0.3	
SMD1812P125TF	125	1.25	2.5	8	0.4	16	100	0.8	0.05	0.14	1812	4.37	4.73	3.07	3.41	0.3	0.8	0.3	
SMD1812P150TF	150	1.5	3	8	0.5	8	100	0.8	0.04	0.16	1812	4.37	4.73	3.07	3.41	0.3	0.8	0.3	
SMD1812P150TF/16	150 16V	1.5	3	8	0.5	16	100	0.8	0.04	0.16	1812	4.37	4.73	3.07	3.41	0.8	1.8	0.3	
SMD1812P160TF	160	1.6	2.8	8	1	8	100	0.8	0.03	0.13	1812	4.37	4.73	3.07	3.41	0.3	0.8	0.3	
SMD1812P200TF	200	2	4	8	2	8	100	0.8	0.02	0.1	1812	4.37	4.73	3.07	3.41	0.4	0.8	0.3	
SMD1812P260TF	260	2.6	5	8	2.5	8	100	0.8	0.015	0.05	1812	4.37	4.73	3.07	3.41	0.5	1	0.3	
SMD1812P300TF	300	3	5	8	4	8	100	0.8	0.012	0.04	1812	4.37	4.73	3.07	3.41	0.5	1.2	0.3	
SMD1812P350TF	350	3.5	6	10	4	6	100	2	0.008	0.03	1812	4.37	4.73	3.07	3.41	0.5	1.2	0.3	

### Vocabulary

Ihold = Hold current: maximum current device will pass without tripping in 23°C still air.

Itrip = Trip current: minimum current at which the device will trip in 23 °C still air.

Vmax = Maximum voltage device can withstand without damage at rated current (I max)

Imax = Maximum fault current device can withstand without damage at rated voltage (Vmax)

Pd typ = Typical power dissipated from device when in the tripped state at 23 °C still air.


Rmin = Minimum resistance of device in initial (un-soldered) state.

R1max = Maximum resistance of device at 23 °C measured one hour after tripping or reflow soldering of 260 °C for 20 sec.


# Positive Thermal Coefficent - SMD1812 Series

## Thermal Derating Chart-IH(A)

Thermal Derating Curve

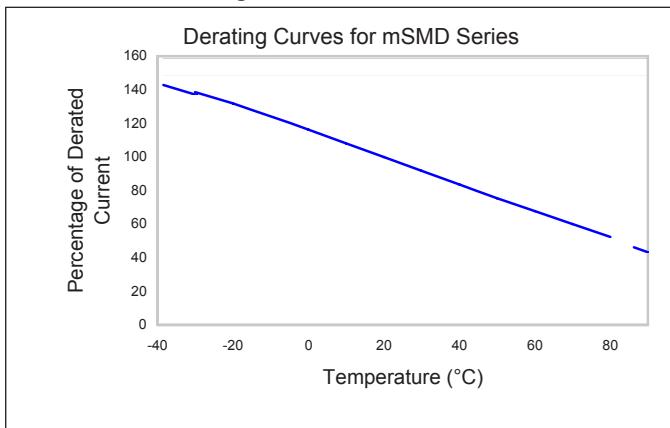

Typical Time-To-Trip At 25°C

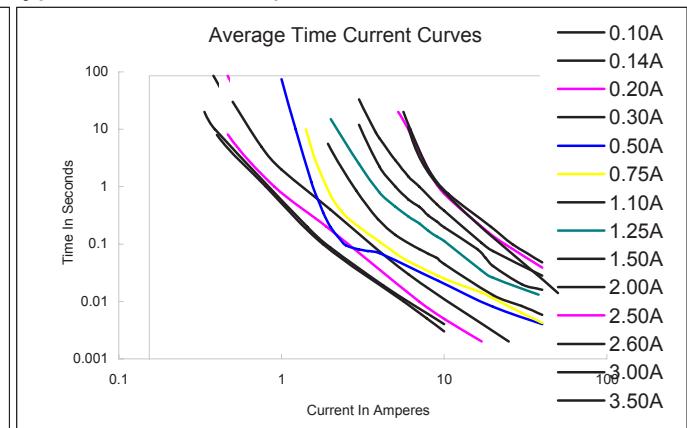


Type Number	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
SMD1812P010TF	0.16	0.14	0.12	0.11	0.08	0.07	0.06	0.05	0.03
SMD1812P014TF	0.23	0.19	0.17	0.14	0.12	0.10	0.09	0.08	0.06
SMD1812P020TF	0.29	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.10
SMD1812P030TF	0.44	0.39	0.35	0.30	0.26	0.23	0.21	0.18	0.15
SMD1812P050TF	0.59	0.57	0.55	0.50	0.45	0.43	0.35	0.30	0.23
SMD1812P050TF/30	0.59	0.57	0.55	0.50	0.45	0.43	0.35	0.30	0.23
SMD1812P075TF	1.10	0.99	0.87	0.75	0.63	0.57	0.49	0.45	0.35
SMD1812P075TF/24	1.10	0.99	0.87	0.75	0.63	0.57	0.49	0.45	0.35
SMD1812P075TF/33	1.10	0.99	0.87	0.75	0.63	0.57	0.49	0.45	0.35
SMD1812P110TF/8	1.60	1.45	1.28	1.10	0.92	0.83	0.71	0.66	0.52
SMD1812P110TF/16	1.60	1.45	1.28	1.10	0.92	0.83	0.71	0.66	0.52
SMD1812P110TF/24	1.60	1.45	1.28	1.10	0.92	0.83	0.71	0.66	0.52
SMD1812P110TF/33	1.60	1.45	1.28	1.10	0.92	0.83	0.71	0.66	0.52
SMD1812P125TF/16	2.00	1.75	1.52	1.25	1.00	0.95	0.90	0.75	0.53
SMD1812P125TF	2.00	1.75	1.52	1.25	1.00	0.95	0.90	0.75	0.53
SMD1812P150TF	2.30	2.05	1.77	1.50	1.23	1.09	0.95	0.82	0.61
SMD1812P150TF/12	2.30	2.05	1.77	1.50	1.23	1.09	0.95	0.82	0.61
SMD1812P150TF/24	2.30	2.05	1.77	1.50	1.23	1.09	0.95	0.82	0.61
SMD1812P160TF	2.80	2.06	1.88	1.60	1.26	1.12	0.98	0.84	0.63
SMD1812P200TF	2.88	2.61	2.25	2.00	1.80	1.66	1.45	1.09	0.80
SMD1812P260TF	3.90	3.42	2.96	2.60	2.33	2.07	1.94	1.35	1.00
SMD1812P260TF/12	3.90	3.42	2.96	2.60	2.33	2.07	1.94	1.35	1.00
SMD1812P300TF	4.15	3.76	3.46	3.00	2.55	2.28	2.01	1.61	1.33
SMD1812P350TF	4.84	4.39	4.04	3.50	2.98	2.66	2.35	1.88	1.55

# Positive Thermal Coefficient - SMD1812 Series


## Recommended Solder Reflow Conditions

- Recommended reflow methods: IR, vapor phase oven, hot air oven, N2 environment for lead-free
  - Recommended maximum paste thickness is 0.25mm (0.010 inch)
  - Devices can be cleaned using standard industry methods and solvents.
- Note 1: All temperature refer to topside of the package, measured on the package body surface.  
Note 2: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

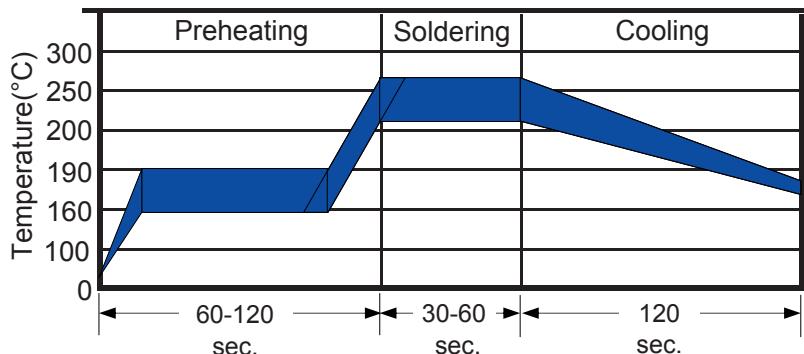


## Tape And Reel Specifications (mm) EIA Tape Component Dimension

Governing Specifications	EIA 481-2
W	$12 \pm 0.20$
P <sub>0</sub>	$4.0 \pm 0.10$
P <sub>1</sub>	$8.0 \pm 0.10$
P <sub>2</sub>	$2.0 \pm 0.05$
A <sub>0</sub>	$3.5 \pm 0.23$
B <sub>0</sub>	$5.1 \pm 0.15$
B <sub>1max</sub>	5.9
D <sub>0</sub>	$1.5+0.1,-0$
F	$5.5 \pm 0.05$
E <sub>1</sub>	$1.75 \pm 0.10$
E <sub>2min</sub>	10.25
T <sub>max</sub>	0.6
T <sub>1max</sub>	0.1
K <sub>0</sub>	$0.9 \pm 0.15$
Leader min.	390
Trailer min.	160
Reel Dimensions	
A max	178
N min.	60
W <sub>1</sub>	$12.4+20,-0.0$
W <sub>2max.</sub>	18.4

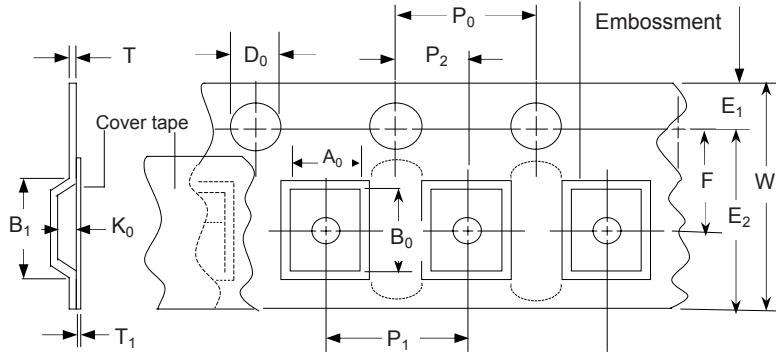

## EIA Reel Dimensions

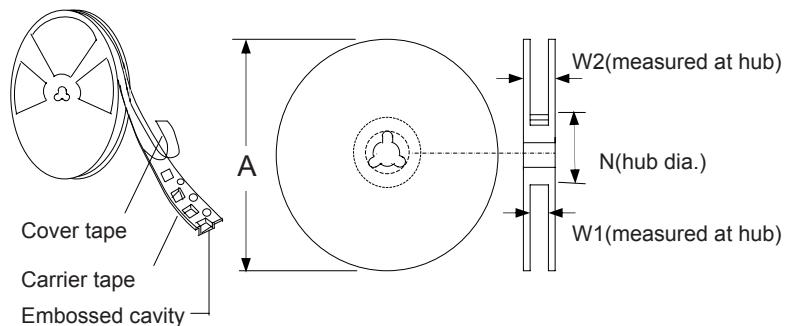

### Storage And Handling

- Storage conditions : 40°C max, 70% R.H.
- Devices may not meet specified performance if storage conditions are exceeded.

## RuiLongYuan Electronics Co., Ltd.

- Reproducing and modifying information of the document is prohibited without permission from Ruilongyuan International Inc.
- Ruilongyuan International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Ruilongyuan International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Ruilongyuan International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications.Ruilongyuan International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment,aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ruilongyuan International Inc. for any damages resulting from such improper use or sale.