

*Material and plating

Screw: M2.5, Steel, Zinc plating


Contact Material: Brass, Nickel plating

Plastic part: PA66, UL94V-0

*Mechanical property

Operating Temperature: -40°C to +105°C

Maximum Temperature: +250°C per 5 seconds

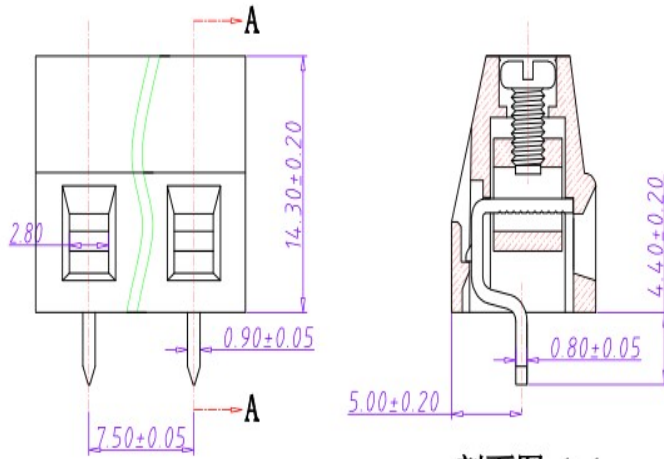

剖面图 A-A



*Electrical Properties

Voltage rating: 300V

Current rating: 10A

Contact Resistance: 20mohm

Insulation Resistance: 5000Mohm/1000V

Voltage Resistance: AC2000V/1Min

Wire type: 22-12AWG 2.5 mm²

Torsional Moment: 0.4Nm (3.6lb.in)