


Microphone




尺寸简图 Dimensions Drawing (Unit: mm)

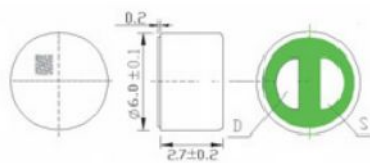


测试 (工作) 电路图
Schematic Diagram

典型频响曲线
Typical Frequency Response Curve

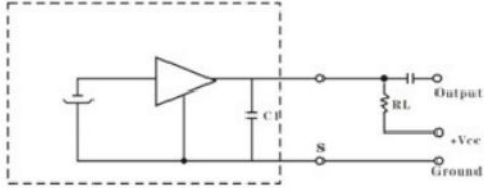

$C=1\mu F$ $R_l=2.2K\Omega$ $V_{cc}=4.5V$ (可根据客户需求内置
一个或两个电容 $C_1, C_2, C_1=33PF, C_2=10PF$)

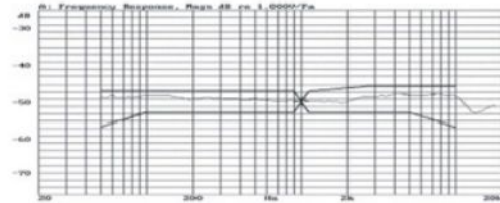

No. 序号	Item 项目	Specification 规格
1	Dimensions 尺寸	6.0*2.7mm
2	Sensitivity (0dB=1v/Pa 1000Hz) 灵敏度	-48--66dB
3	Frequency range 频响范围	50--20KHz
4	Directivity 方向特性	Omnidirectional 全指向
5	Impedance 阻抗	Low Impedance 低阻抗
6	Current Consumption 电流消耗	Max. 500uA
7	Standard Operation Voltage 标准工作电压	3V
8	Operation Voltage Range 工作电压范围	1.5--10V
9	S/N Range 信噪比	>58dB