
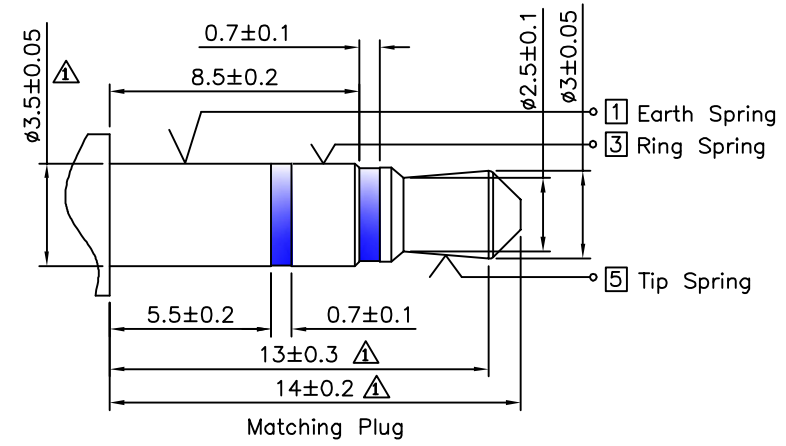
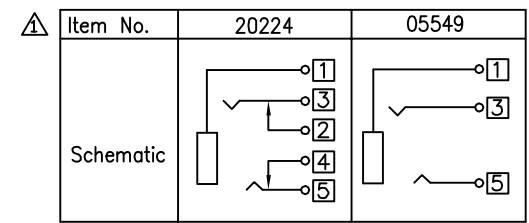


△ SPECIFICATION
 Rating: DC 30V, 0.5A
 Contact Resistance: 30 Milliohms Max.
 After Test: 50 Milliohms Max.
 Insulation Resistance: 100 Megaohms Min. (500V DC)
 After Test: 50 Megaohms Min.
 Withstand Voltage: 500V AC
 Insertion And Extraction Force: 3~30N
 Life Test: 5000 Cycles Min.
 Operation Temperature Range: -20°C~+70°C
 Preservative Temperature Range: -40°C~+85°C
 RoHS Compliant

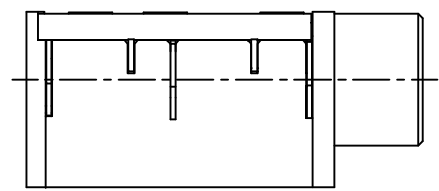

○:Item No. □:Terminal No.

No.	Description	Q'ty	Material	Remark
⑩	Bushing		Copper Alloy	Nickel Plated
⑨	Spring-2	1	Spring Wire	Nickel Plated
⑧	Spring-1	1	Spring Wire	Nickel Plated
⑦	Tip Spring	⑤ 1	Phosphor Bronze	Tin Plated
⑥	Shunt Terminal-2	④ 1	Brass	Tin Plated
⑤	Shunt Terminal-1	② 1	Brass	Tin Plated
④	Ring Spring	③ 1	Phosphor Bronze	Silver Plated
③	Earth Terminal	① 1	Brass	Tin Plated
②	Cover	1	PBT	—
①	Housing	1	PBT	Black

5 PIN Headphone jack/Audio connector

DRAWING No.		APPROVED BY	
05549		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		SONG	
SCALE	NONE	REV.	B2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.3
 .X ±0.3
 .XX ±0.3
 ANG. ±2°

NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	03/31/2012
△ B1		Modify Data	HZF	01/06/2012
△ B0		NEW RELEASE	HZF	01/01/2010