
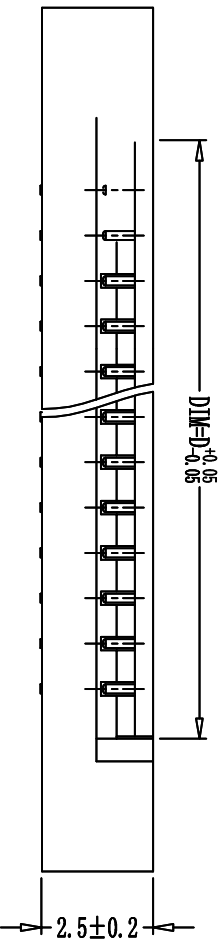



**Electrical Characteristics:**  
 Current rating: 0.5A AC/DC  
 Voltage rating: 50V AC/DC  
 Temperature range: -25°C~+85°C  
 Withstand Voltage: 500V AC/Minute  
 Contact Resistance:  $\leq 20m\Omega$   
 Insulation resistance:  $\geq 800m\Omega$   
 Relative Humidity: 93%+40°C

**Material Description:**  
 Contact: Phosphor Bronze Tin-Leadplated  
 Solder Tdb: Phosphor Bronze Tin-plated  
 Housing: Thermoplastic(UL94V-0)  
 Slider: Thermoplastic(UL94V-0)

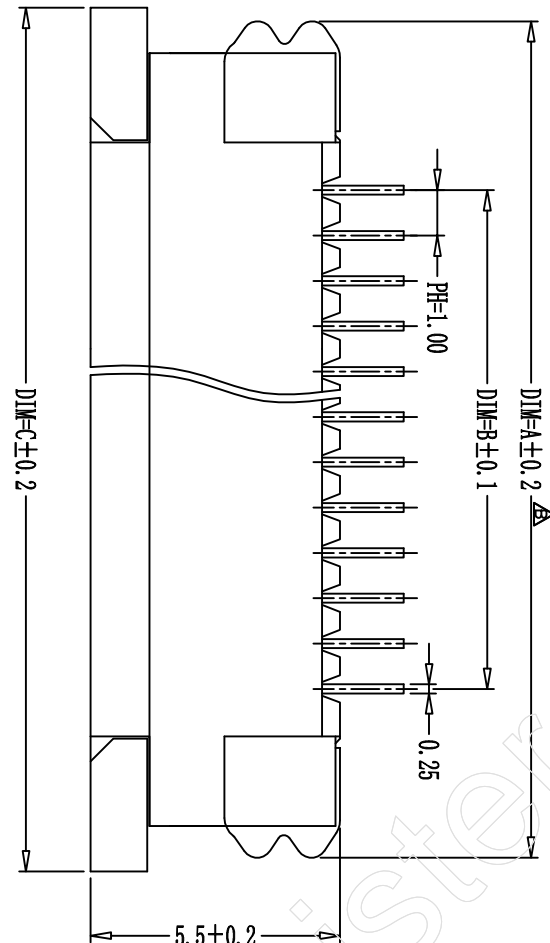

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	36.4	29.00	37.0	31.10
29P	35.4	28.00	36.0	30.10
28P	34.4	27.00	35.0	29.10
27P	33.4	26.00	34.0	28.10
26P	32.4	25.00	33.0	27.10
25P	31.4	24.00	32.0	26.10
24P	30.4	23.00	31.0	25.10
23P	29.4	22.00	30.0	24.10
22P	28.4	21.00	29.0	23.10
21P	27.4	20.00	28.0	22.10
20P	26.4	19.00	27.0	21.10
19P	25.4	18.00	26.0	20.10
18P	24.4	17.00	25.0	19.10
17P	23.4	16.00	24.0	18.10
16P	22.4	15.00	23.0	17.10
15P	21.4	14.00	22.0	16.10
14P	20.4	13.00	21.0	15.10
13P	19.4	12.00	20.0	14.10
12P	18.4	11.00	19.0	13.10
11P	17.4	10.00	18.0	12.10
10P	16.4	9.00	17.0	11.10
9P	15.4	8.00	16.0	10.10
8P	14.4	7.00	15.0	9.10
7P	13.4	6.00	14.0	8.10
6P	12.4	5.00	13.0	7.10
5P	11.4	4.00	12.0	6.10
4P	10.4	3.00	11.0	5.10

SER	AREA	REVISIONS	CHK	DATE	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
△					X.XX ±0.15
△					X.XX ±0.05
△					ANG. ±0.30°
△					UNIT MM

APPROVED	DATE	PART NO.	1. OK-ES-nPWB
CHECKED	DATE	DRAWING NO.	JUSHUO
DRAWN	DATE	COMPUTER NO.	
SCALE	SCALE	SCALE	SCALE
NUMBER	NUMBER	NUMBER	NUMBER
81	81	A3	A

深圳市钜硕电子有限公司