





PCB Layout

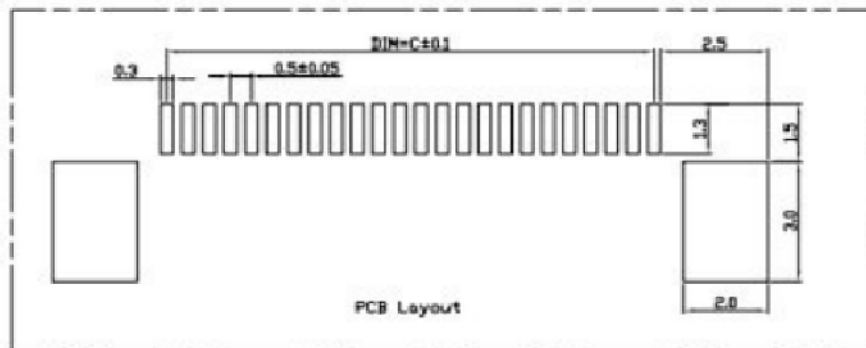


DIM=A

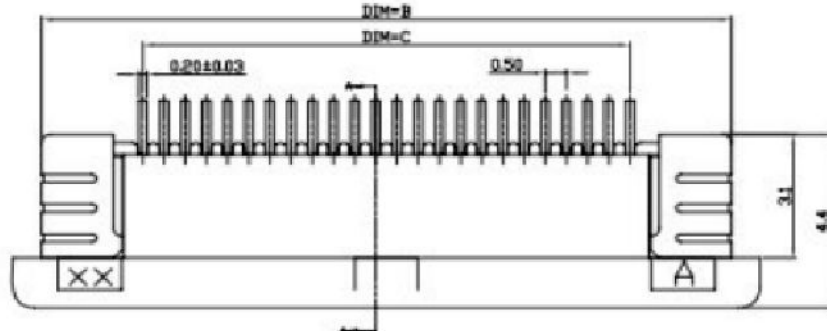

DIM=B

DIM=C

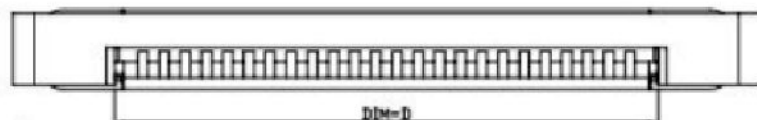

DIM=D


0.5mm Pitch 2.0mm High Drawer touch up

Electrical Characteristics:

Current rating: 0.4A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: <20mΩ
Insulation resistance: >500MΩ
Relative Humidity: 93%±40°C

Material Description:

Terminal: Phosphor Bronze Tin-plated
Fitting Nail: Brass Tin-plated
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)

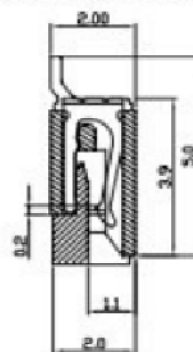

SECTION A-A

上接板



PIN数	DIM=A	DIM=B	DIM=C	DIM=D
34P	22.60	21.50	16.50	17.65
33P	22.10	21.00	16.00	17.15
32P	21.60	20.50	15.50	16.65
31P	21.10	20.00	15.00	16.15
30P	20.60	19.50	14.50	15.65
29P	20.10	19.00	14.00	15.15
28P	19.60	18.50	13.50	14.65
27P	19.10	18.00	13.00	14.15
26P	18.60	17.50	12.50	13.65
25P	18.10	17.00	12.00	13.15
24P	17.60	16.50	11.50	12.65
23P	17.10	16.00	11.00	12.15
22P	16.60	15.50	10.50	11.65
21P	16.10	15.00	10.00	11.15
20P	15.60	14.50	9.50	10.65
19P	15.10	14.00	9.00	10.15
18P	14.60	13.50	8.50	9.65
17P	14.10	13.00	8.00	9.15
16P	13.60	12.50	7.50	8.65
15P	13.10	12.00	7.00	8.15
14P	12.60	11.50	6.50	7.65
13P	12.10	11.00	6.00	7.15
12P	11.60	10.50	5.50	6.65
11P	11.10	10.00	5.00	6.15
10P	10.60	9.50	4.50	5.65
9P	10.10	9.00	4.00	5.15
8P	9.60	8.50	3.50	4.65
7P	9.10	8.00	3.00	4.15
6P	8.60	7.50	2.50	3.65

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: X.X ±0.15 X.XX ±0.10 X.XXX ±0.07 AND UNIT: MM				APPROVED DATE		PART NO. PFC052002-XXUT	
				CHECKED DATE		DRAWING NO.	
				DRAWN DATE		COMPUTER NO.	
SER AREA REVISIONS CHK DATE				NUMBER	SCALE	SIZE	NAME
					1:1	A4	PFC05连接器上接成品图
							REV A