


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

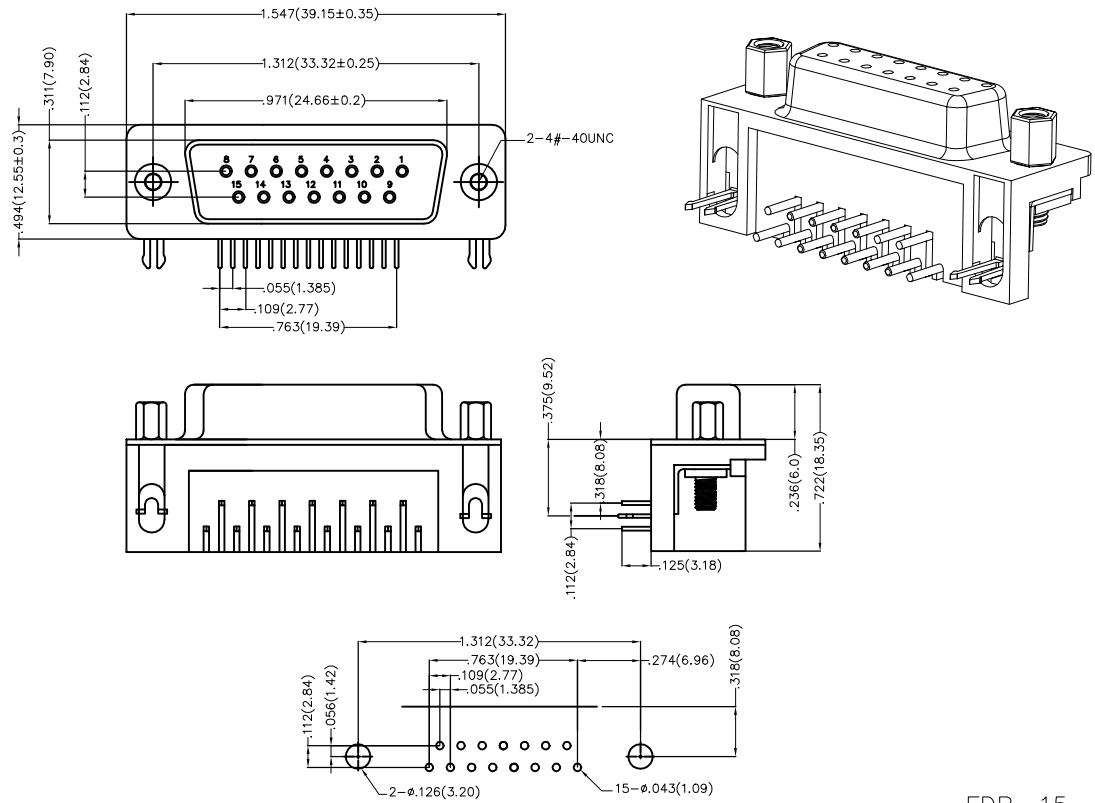

Recommended P.C.Board Layout

Products Categories: A.B.C.D

<p>Part No.:FDB1502-F0DB3XXXLX</p> <p>A Type</p>	<p>Part No.:FDB1502-F0DB3XXXLB</p> <p>B Type</p>	<p>Screws</p> <p>.187(4.75) .465(11.80) .189(4.80)</p>
<p>Part No.:FDB1502-F0DB3XXXLC</p> <p>C Type</p>	<p>Part No.:FDB1502-F0DB3XXXLD</p> <p>D Type</p>	

Ordering Information

FDB 15 02 - F0 D B 3 XX XX L X
 1 2 3 4 5 6 7 8 9 10 11

1 Series Name FDB- D-SUB	2 Circuits 15	3 Distinction No. 02	4 Type F0-Female	5 Assembly Layout D-DIP	6 Entry Type B-Side entry type
7 Plating 3-Half Gold/Tin	8 Thickness of Plating 00-Gold Flash 03-3u" Custom Plate Available	9 Plastic Colour K6-Black U1-Blue	10 Packaging L-PE Pipe	11 Products Categories A-A Type B-B Type C-C Type D-D Type	

SPECIFICATIONS

- Electrical
- Current Rating: 3A AC(rms)/DC
 - Voltage Rating: 250V AC(rms)/DC
 - Contact Resistance: 25 mΩ Max
 - Insulation Resistance: 1000 MΩ MIN
 - Withstanding Voltage: 500V AC r.m.s
 - Temperature Range-Operating: -55°C~+105°C
- Material and Finish
- Housing: PBT UL 94V-0
 - Contact: Copper Alloy/Gold Flash Plated On Contact Area Tin Plated On Solderails, Nickel Under Plated Over All/Gold Plated Options
 - Shell: Spcc/Nickel Plated Over All
 - Board Lock: Copper Alloy/Tin Plated Over All
 - Screws: Copper Alloy/Nickel Plated Over All

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB1502-F0DB3XXXLX	ITEM NO. FDB1502	<p>Leader Of Industry</p>
	X.±.012(0.30)	X.±5'	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB 15PIN FEMALE CONN		
	X.XX±.008(0.20)	.X'±2'	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	X.XX±.006(0.15)	.XX'±1'					
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5'				

REV 0 SHEET NO. 1/1