
PRODUCT SPECIFICATION

Customer : _____

Part No : XY-1206-1-HBC




Developed No : _____

Date : _____

CUSTOMER	APPROVED	BY

APPROVED	Q.C.	R&D

Outline Dimension:

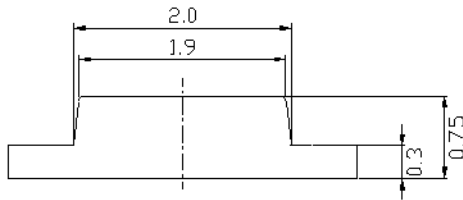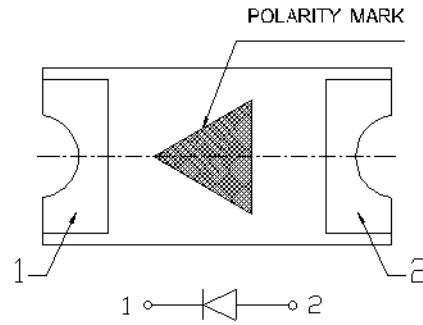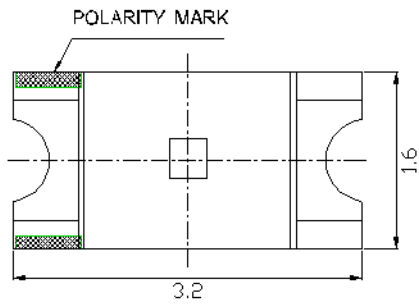


Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.1 unless otherwise noted.
3. Specifications are subject to change without notice.

View Angle:

市星宇光电有限公司

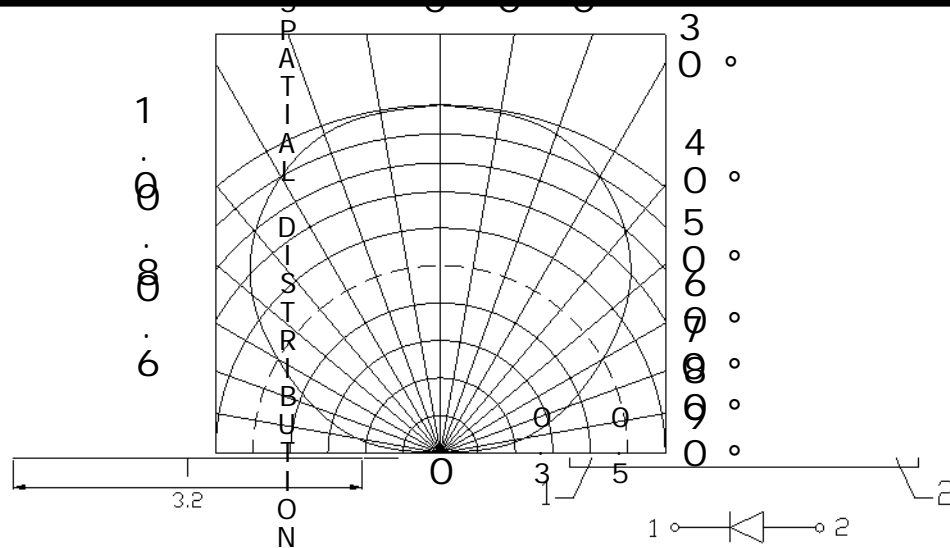

Typical Electrical & Optical Characteristics(Ta=25 °)








Items	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	VF	IF =20mA	3.0	3.1	3.2	V
Reverse Current	IR	VR =5V	---	---	5	μ A
Dominant Wavelength	d	IF =20mA	465		470	nm
Luminous Intensity	Iv	IF =20mA	200	---	250	mcd
View Angle	2 1/2	IF =20mA	---	120	---	Deg

Absolute Maximum Ratings (Ta = 25 °)

Items	Symbol	Absolute maximum Rating	Unit
Power Dissipation	PD	120	mW
Forward Current(DC)	IF	30	mA
Peak Forward Current	IFP	120	mA
Reverse Voltage	VR	5	V
Operation Temperature	Topr	- 40 ~ + 85	
Storage Temperature	Tstg	- 40 ~ + 85	

Note :1/10 Duty Cycle , 0.1 ms Pulse Width.

Typical Electrical/Optical Characteristics Curves:

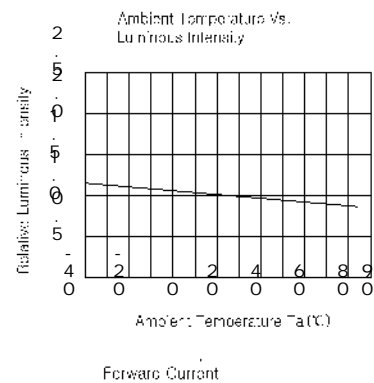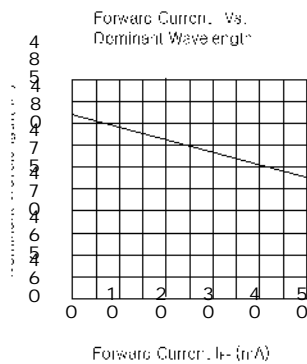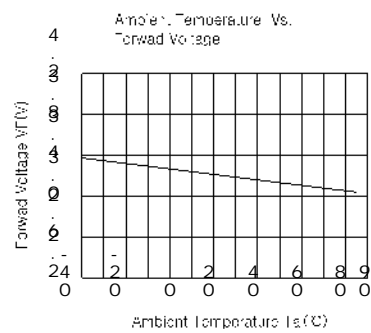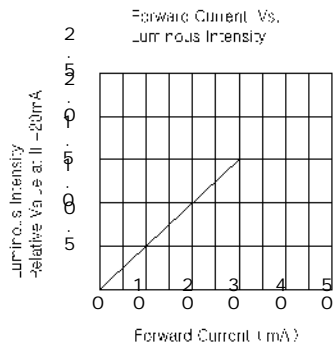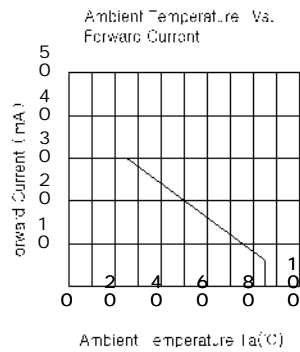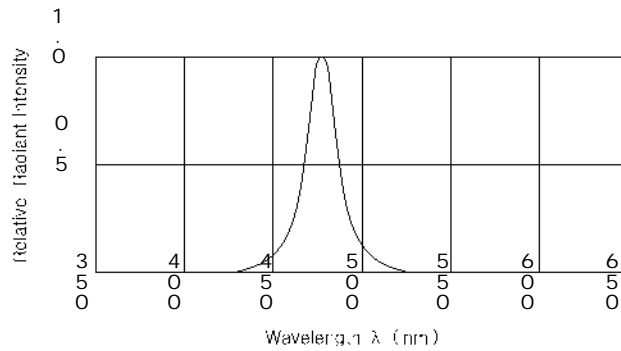


Relative Intensity

Forward Current

Reliability Test :

Classification	Test Item	Test Conditions	Duration	Units Tested	Number of Damaged
Life Test	Operating Life Test	Ta = 25 ± 5 , RH=55 ± 20%RH, IF=30mA	1000hrs	22	0/22
Environment Test	High Temperature Storage	Ta = 100 ± 10	1000hrs	22	0/22
	Low Temperature Storage	Ta = - 40 ⁺³	1000hrs	22	0/22
	Temp & Humidity Storage	Ta = 85 ⁺⁵ RH=85 ⁺⁵ %RH ₋₁₀	1000hrs	22	0/22
	Thermal Shock Test	Ta = - 40 ⁺⁵ ~ 100 ₋₅ T=5min - 5min	100 Cycles	22	0/22
	Temperature Cycling Test	Ta = - 40 ⁺³ ~ 25 ~ 100 ₋₃ ~ 25 ⁺⁵ T=30min-5min-30min-5min	10Cycles	22	0/22

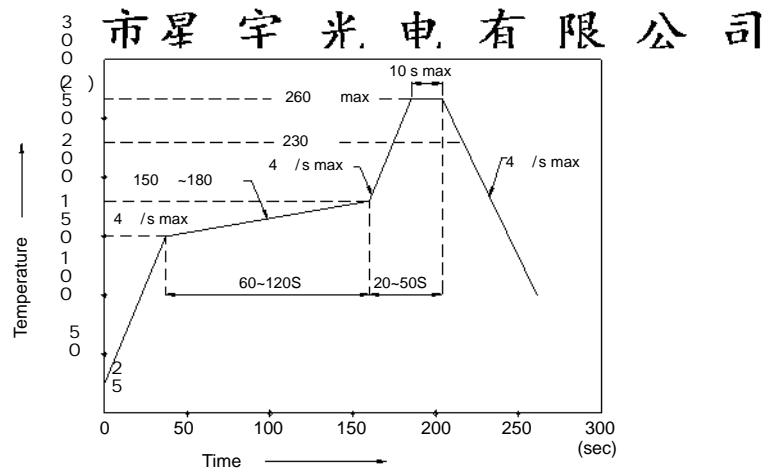


NOTES:

		T _h (+/-5) . e		
	1. maximum soldering temperature should be limited to 260 2. Don't cause stress to the epoxy resin while it is exposed to high temperature. 3. Number of reflow process shall be 2 times or less.			

Recommended Soldering Pattern:

(Units:mm)

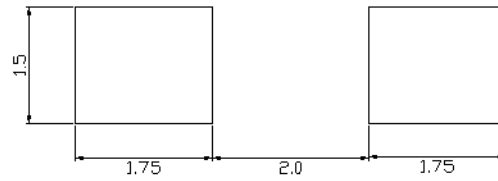

Tape Specifications:

(Units:mm)

